

SECTION VIEW

RESIN BOUND TREE PIT SYSTEM


GEOBOND[®]X TREE PIT SYSTEM IS A COLD TWO-PART POLYURETHANE RESIN PAVING SYSTEM. THE POLYURETHANE RESIN BASE BONDS NATURAL AGGREGATES OR RECYCLED MATERIAL TO CREATE PERMEABLE, FLEXIBLE, AND LONG-LASTING SURFACES.

GENERAL SPECIFICATIONS:

1. WARRANTY REQUIRES APPLICATION IS COMPLETED BY A TRAINED AND CERTIFIED APPLICATOR
2. RESIN BOUND PAVING IS APPLIED TO CLEAN DRY SURFACES WITH 2- 4 INCHES OF CLEAN CRUSHED STONE ABOVE THE GRADE OF THE TOP OF THE ROOT BALL. THIS HELPS TO ENSURE PROPER DRAINAGE AND DISCOURAGE THE ROOT SYSTEM FROM GROWING UPWARD. IF USING MODULAR SOIL CONTAINMENT, OR TREE ROOT SYSTEM, PLEASE FOLLOW MANUFACTURER INSTALLATION INSTRUCTIONS FOR THESE COMPONENTS.
3. CLEAN AND LIGHTLY COMPACT THE SOIL IN THE AREA TO BE PAVED, AND PLACE PERMEABLE GEOTEXTILE FILTER FABRIC TO KEEP SOIL FROM MIGRATING UPWARD.
4. ADD LOSE BASE ROCK TO A RECOMMENDED 2 - 4 INCHES OF 3/4" CLEAN STONE WITHOUT FINES, LEAVING A MINIMUM OF 1 INCH BELOW THE FINISHED GRADE FOR RESIN PAVING. LEVEL AND GENTLY COMPACT THE BASE AGGREGATE.
5. PLACE A PROTECTIVE TREE COLLAR, OR LOOSE DECORATIVE AGGREGATE AT THE BASE OF THE TREE TRUNK TO ALLOW FOR TREE GROWTH.
6. MIX AND INSTALL RESIN BOUND PAVING PER THE MANUFACTURERS SPECIFICATIONS.

NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. DO NOT SCALE DRAWING.
3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.




RESIN BOUND PERMEABLE PAVING

TREE PIT INSTALLATION

REVISION DATE 9/30/2022

Alternate Loose Aggregate Wedge

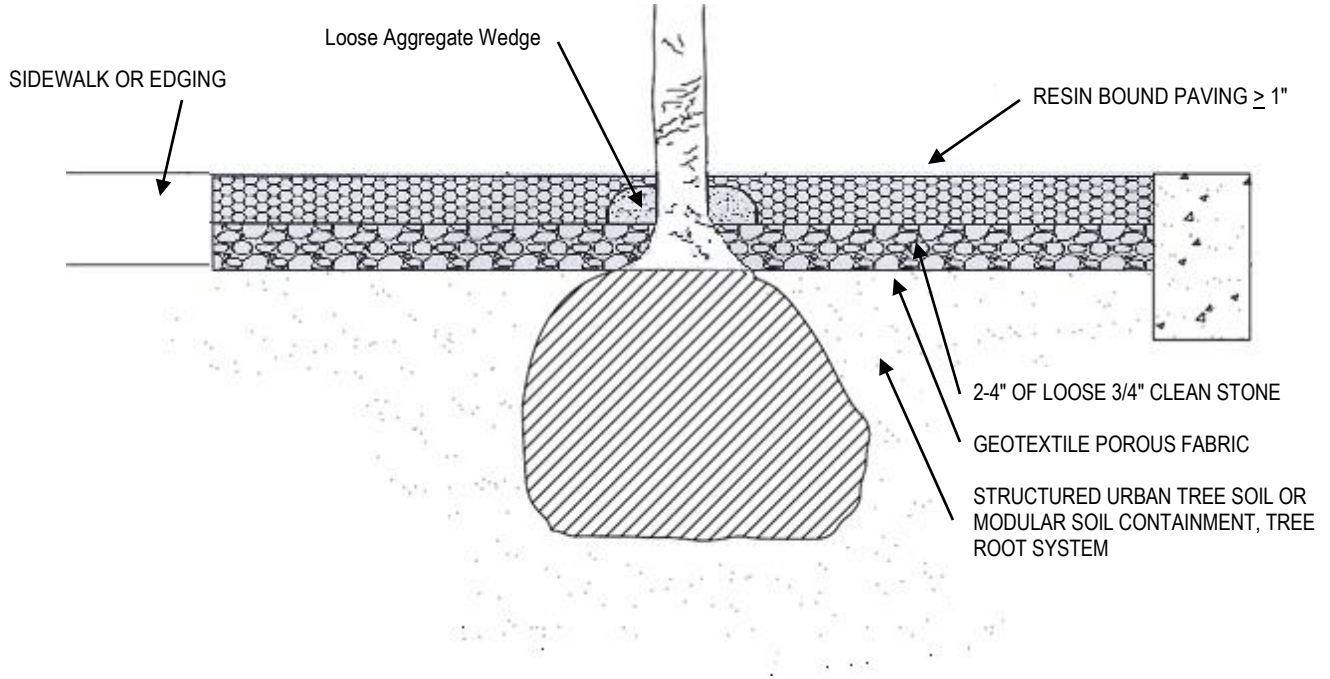

Not drawn to scale.